


CDM-CC60 Elastomer Acoustic Suspension Hangers have been designed to suspend acoustic ceilings using 60mm standard profile (or CDM Profile-C60/27-2000), improving airborne isolation performance

System features:

- Cost effective
- Quick and easy to install
- Hangers can be ordered in two different stiffnesses:

CDM-CC60-150	10-20 kg per hanger
CDM-CC60-350	20-45 kg per hanger
- Natural frequency between 12 and 18Hz
- System comes optional with an elastomer washer to allow direct fixation to the ceiling
- Variable void depths are achievable (CDM-CC60 hanger depth is 47mm)
- Steel elements are Zinc plated
- For optimum results resilient perimeter strips should be used to provide lateral isolation between the suspended ceiling and adjacent walls. A wide range of roll sizes are available

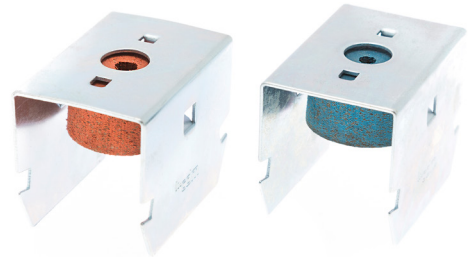

To specify which CDM-CC60 hangers you require CDM's engineers will need the following information:

- The weight and construction of the supported ceiling - this will determine the type of hanger
- The required void between the supporting soffit and the suspended ceiling

