




Scan here for access to solution website page for other documents

# Stravilink CC60-S


## Datasheet

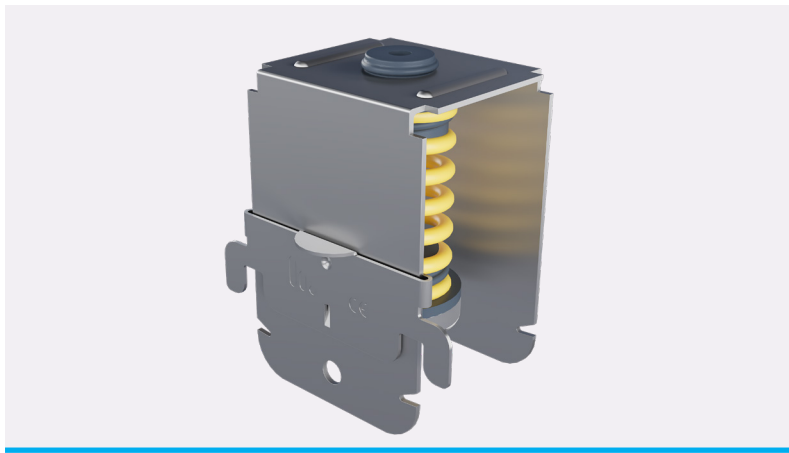

Stravilink CC60-S is a Channel Clip using Springs, designed for suspending acoustic ceilings with 60 mm steel ceiling channels and optimising sound insulation between vertically arranged rooms.

### FEATURES

- Suitable for installation on various structures, including concrete and cross-laminated timber (CLT) slabs
- Designed to be compatible with 60 mm galvanized steel ceiling channels
- Equipped with springs featuring a natural frequency of 4 Hz at design load
- Colour-coded spring options available, supporting loads from 4 to 59 kg
- Requires a minimum void depth of 106 mm. Variable void dept is possible
- Includes a safety clip to prevent ceiling channel deformation due to excess weight
- Elastomeric soundstop extends beyond the metal clip, preventing the rod from making contact, thereby avoiding a short circuit and direct contact with the soffit when attached directly to the ceiling
- Effortless snap-in design lets the hanger quickly and securely attach to the ceiling channel
- No specialized tools are required for installation
- Simple and fast installation process

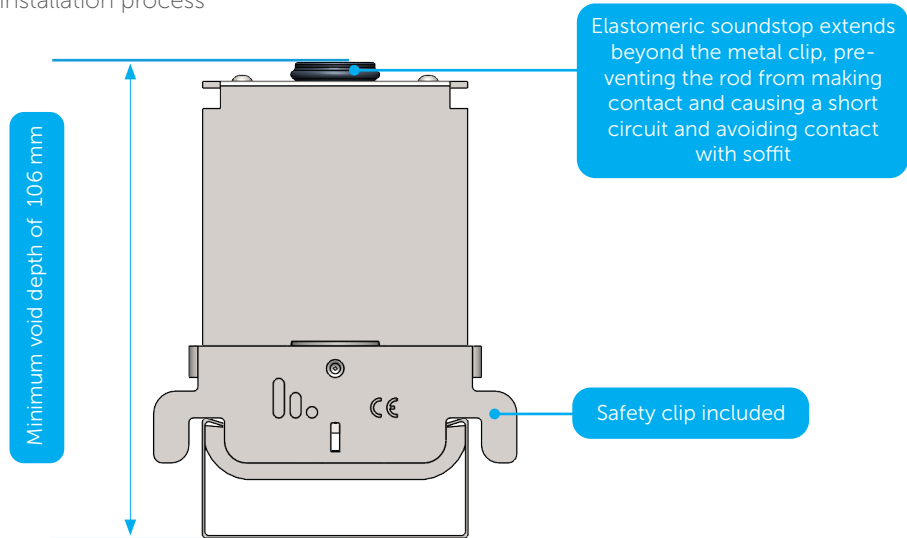


### PACKAGING

Model	Reference	Quantity per Box	Weight per Box [kg]	Dimension of Box [cm]
Stravilink CC60-S75	001974	25	6.10	29 x 23.5 x 17.2
Stravilink CC60-S150	001975	25	6.48	29 x 23.5 x 17.2
Stravilink CC60-S230	001976	25	6.85	29 x 23.5 x 17.2
Stravilink CC60-S340	001977	25	7.18	29 x 23.5 x 17.2
Stravilink CC60-S455	001978	25	7.35	29 x 23.5 x 17.2




Model	Design Load		Resonance Frequency at Design Load	Load Range (per Hanger)		Spring Colour
	kg	N		kg	N	
Stravilink CC60-S75	7.5	75	< 4	4 - 14.5	40 - 145	Light Ivory
Stravilink CC60-S150	15	150	< 4	7.5 - 24	75 - 240	Zinc Yellow
Stravilink CC60-S230	23	230	< 4	11.5 - 31.5	115 - 315	Sky Blue
Stravilink CC60-S340	34	340	< 4	17 - 44	170 - 440	Silver Grey
Stravilink CC60-S455	45.5	455	< 4	23 - 59	230 - 590	Pearl Night Blue

Notes:  
 Products are suited up to a C2 environment (atmosphere with little or no degree of pollution).  
 The temperature range of use is between -30°C and 70°C.  
 To assess which type is appropriate the following information is needed:  
 1) The weight and construction of the supported ceiling - this will determine the type of hanger;  
 2) The weights and support locations of any items hung from the ceiling.

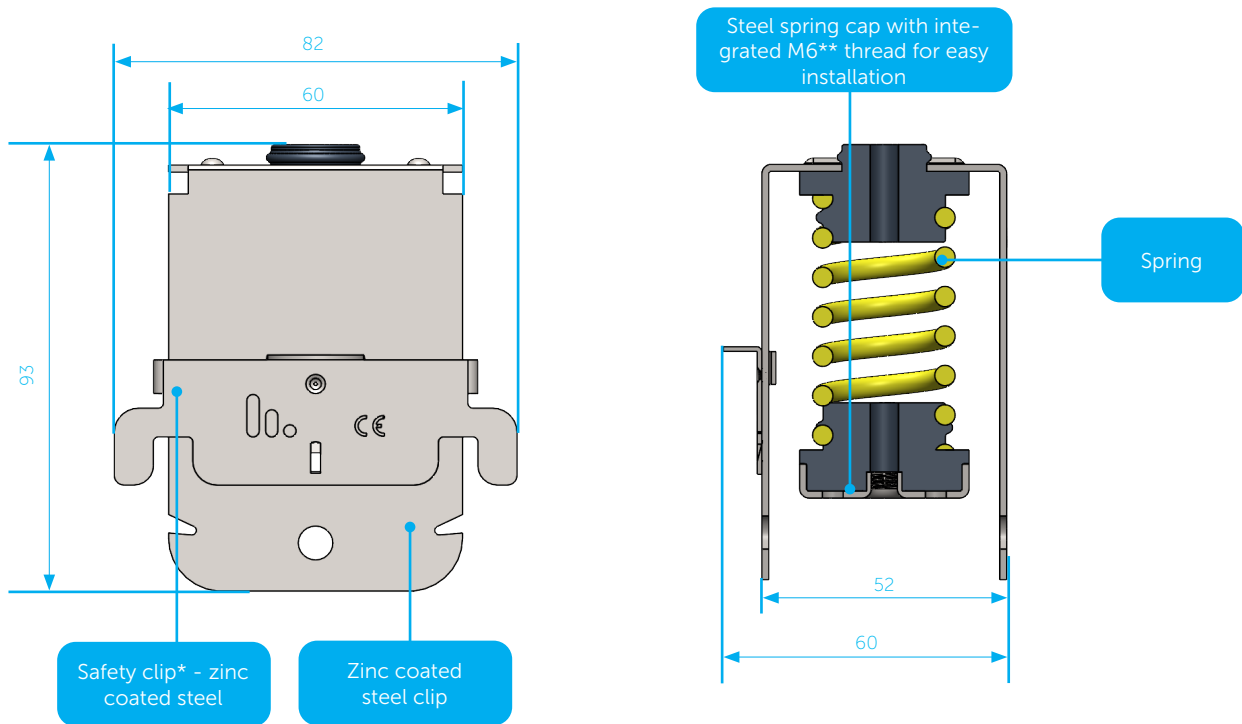


Notes:  
 All dimensions in millimeters (mm).  
 \*Available with double safety clip, upon request.  
 \*\*Available in M8, upon request.

Deflection as Function of Load

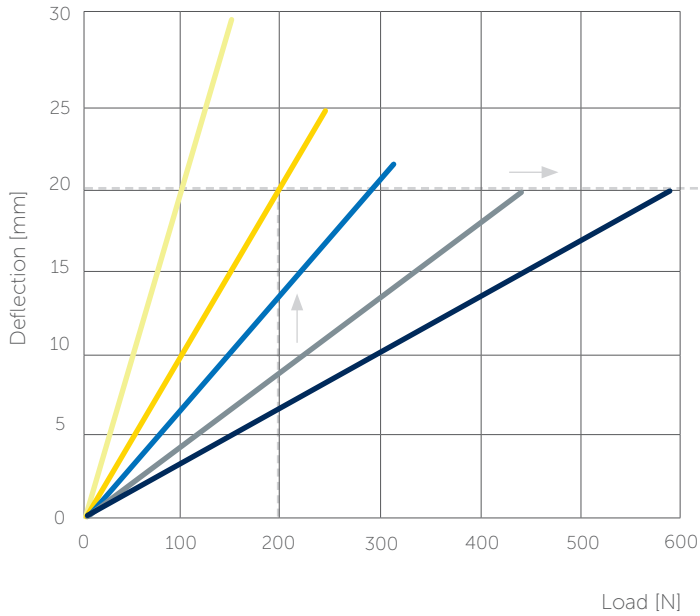


Relationship between Deflection and Resonance Frequency

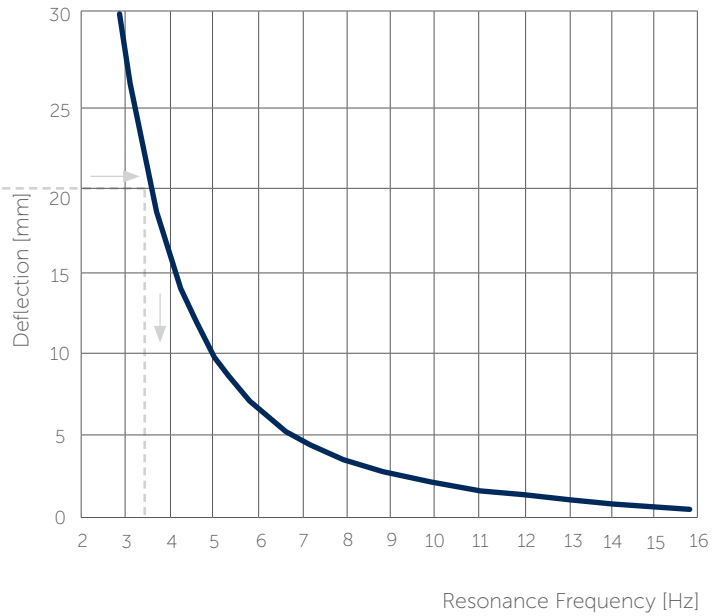

- Stravilink CC60-S75
- Stravilink CC60-S150
- Stravilink CC60-S230
- Stravilink CC60-S340
- Stravilink CC60-S455


The resonance frequency of a Stravilink hanger can be determined by its load. To start the calculation use the graph "deflection as function of load" this will provide the deflection at the specified load. Then moving horizontally to the right hand side plot "deflection as function of frequency" on which the corresponding resonance frequency can be found. As an example, the resonance frequency of a Stravilink CC60-S150 loaded with 200 N is determined. The corresponding deflection is 20 mm. The resonance frequency of a spring at 20 mm deflection is 3.5 Hz.

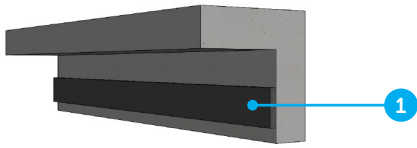

**Perimeter Strip**


1. Self-adhesive perimeter strip 10 mm thick to isolate the ceiling from the adjacent walls.

Note: Standard widths of 50 mm, 100 mm, and 150 mm are available in 10 lm rolls.




**C60 channel**

60 mm wide channel of 2 m available  
 Material: DX51D+Z140  
 Weight: 1.65 kg

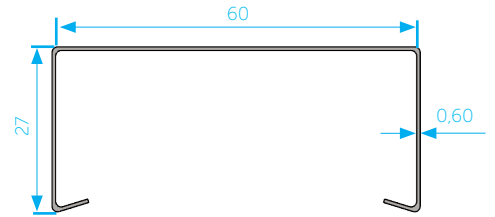


Note: All dimensions in millimeters (mm).

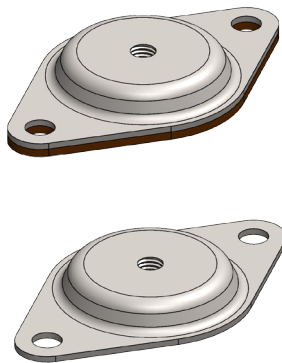


**M6 anchor plate**

Available with (for settlement on rough surfaces) or without rubber (2 mm)  
 Material: DX51D+S275

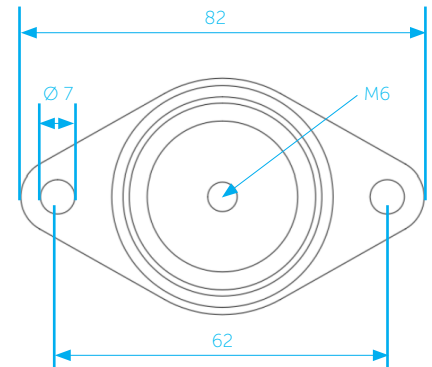

Note: All dimensions in millimeters (mm).




**Stravilink CC60 safety clip**

Material: DX51D+S275  
 Quantity per bag: 25  
 Note: One safety clip is included with the product by default.  
 A second is available upon request.




## TYPICAL ASSEMBLIES

Single ceiling profile and increased void

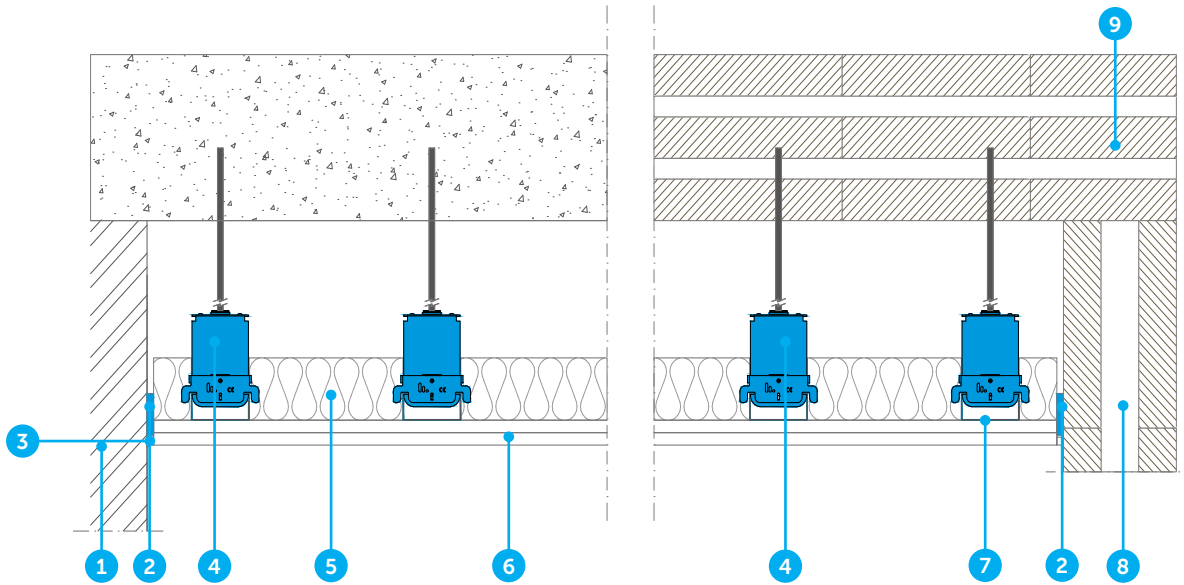

Single ceiling profile and reduced void

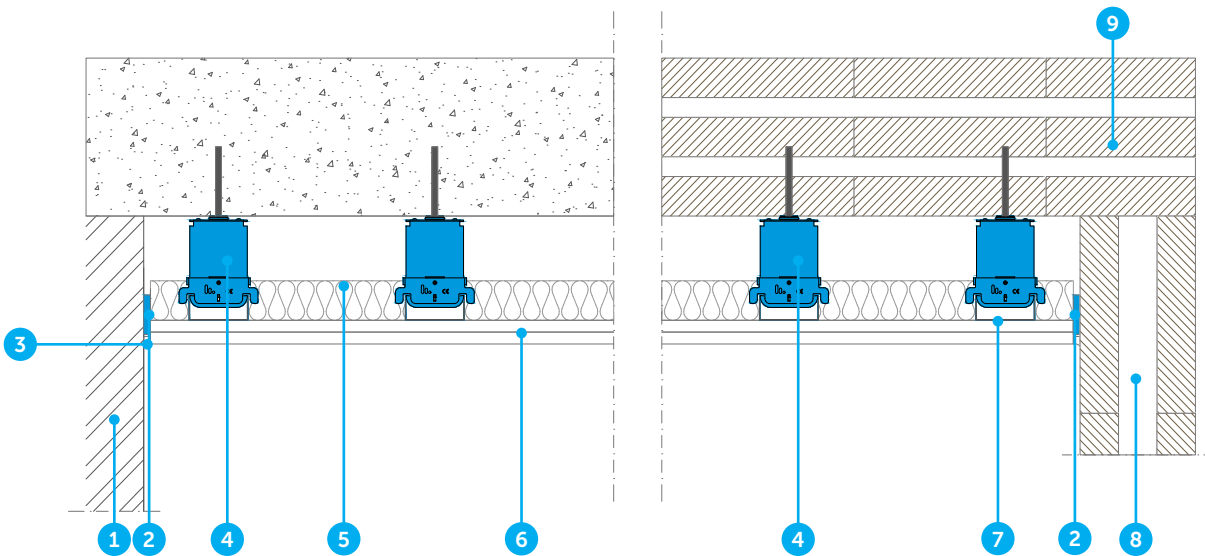

1. Wall
2. Perimeter Strip
3. Elastic caulk
4. Stravilink CC60-S
5. Absorption layer

6. Plasterboards, gypsum board or dry lining
7. 60 mm channel
8. CLT Wall
9. CLT Slab

### DISCLAIMER

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.



Vismeerstraat 3 - 5384 VL Heesch  
0800 55555 44  
info@delta-l.nl  
<https://www.delta-l.nl>

IBAN: NL79 RABO 0375036717  
BIC: RABONL2U  
BTW: NL811318539B01  
KvK: 08071864

## Delta-L B.V. | CDM Stravitec Nederland

Delta-L is specialist op het gebied van geluidsisolatie en trillingsisolatie en ontwerpt, levert en monteert diverse systemen voor akoestische ontkoppelingen in de bouw en industrie.

Delta-L vertegenwoordigt CDM Stravitec op de Nederlandse markt. CDM Stravitec is opgericht in 1951 en is marktleider op het gebied van akoestische oplegsystemen voor de bouw en industrie en is actief in tientallen landen (30+ vestigingen wereldwijd).

Door onze expertise, jarenlange ervaring en grote database aan meetresultaten van zowel interne en externe laboratorium metingen als in situ metingen hebben we door de jaren heen een uitgebreid assortiment aan akoestische materialen ontwikkeld, welke we op een slimme manier verwerken in diverse akoestische systemen.

Tevens zijn wij hierdoor in staat u adequaat van dienst te zijn bij elke stap in het proces: analyse van het geluid of trilling probleem, het aanleveren van een akoestisch ontwerp, optimalisatie van het ontwerp, productie, levering en montage.

Er wordt continu gewerkt aan innovatie en optimalisatie van de akoestische systemen om uw wensen en eisen om te zetten in een deskundig advies op maat.