



Scan here for access to  
solution website page  
for other documents


# Stravilink ISH-P

## Datasheet

Stravilink ISH-P is an Isolation Support Hanger with elastomeric Pads designed to support heavy-duty elements or structures - such as mechanical equipment, ductwork or ceilings with stronger structures - by efficiently handling high suspended loads.

### FEATURES

- Robust steel frame, cable of handling high loads, and finished with a hot-dip galvanized coating for enhanced durability
- Equipped with elastomeric pads featuring a natural frequency of less than 8 Hz at design load
- Available in two elastomeric pad grades, supporting loads from 30 to 280 kg
- Colour-coded black pads enable quick and easy on-site verification of the correct pad type
- Interfaces seamlessly with all ceiling types
- Accommodates variable void depths
- Simple and fast installation process

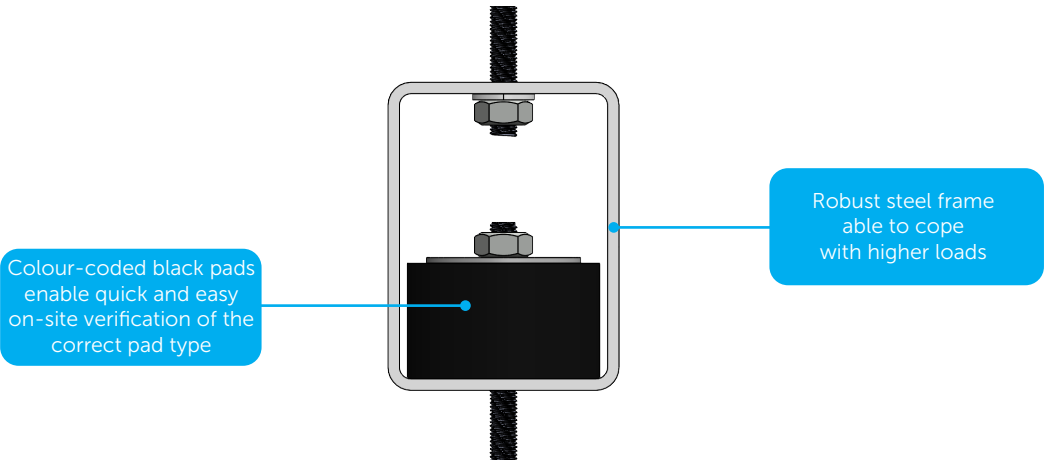

### PACKAGING

| Model                | Reference | Quantity per Box | Weight per Box [kg] | Dimension of Box [cm] |
|----------------------|-----------|------------------|---------------------|-----------------------|
| Stravilink ISH-P1200 | 002024    | 30               | 12.0                | 28 x 18 x 17          |
| Stravilink ISH-P2200 | 002025    | 30               | 12.1                | 28 x 18 x 17          |



## PHYSICAL & MECHANICAL PROPERTIES

| Model                | Design Load |      | Resonance Frequency at Design Load | Load Range (per Hanger) |          | Pad Colour                |
|----------------------|-------------|------|------------------------------------|-------------------------|----------|---------------------------|
|                      | kg          | N    |                                    | kg                      | N        |                           |
| Stravilink ISH-P1200 | 120         | 1200 | < 7.7                              | 30-150                  | 300-1500 | Black with blue paint ●   |
| Stravilink ISH-P2200 | 220         | 2200 | < 8                                | 80-280                  | 800-2800 | Black with yellow paint ● |

### Notes:


Admissible load of steel elements: 4538 N.

Products are suited up to a C2 environment (atmosphere with little or no degree of pollution).

The temperature range of use is between -30°C and 70°C.

To assess which type is appropriate the following information is needed:

- 1) The weight and construction of the supported ceiling or other supported structure - this will determine the type of hanger;
- 2) The weights and support locations of any items hung from the ceiling or other supported structure.

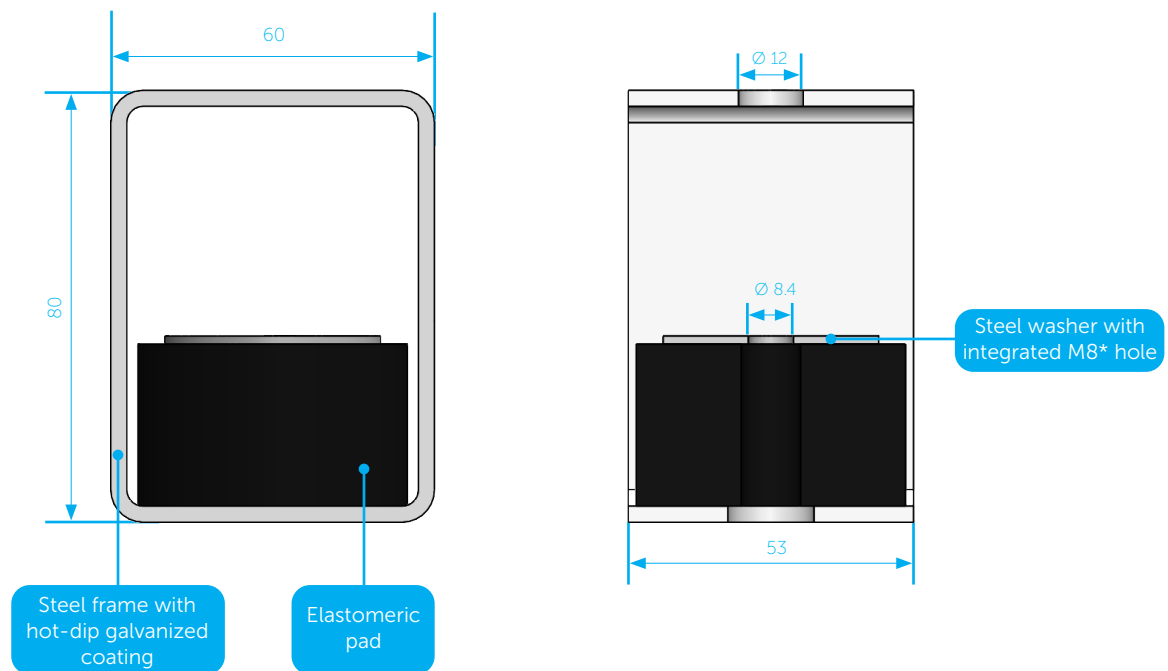

### Notes:


All dimensions in millimeters (mm).

\*Available in M6 and M12 upon request.




## PERFORMANCE GRAPHS

Deflection as Function of Load

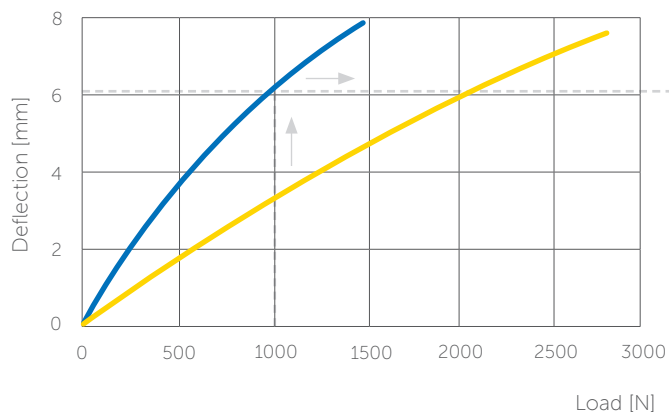

Relationship between Deflection and Resonance Frequency

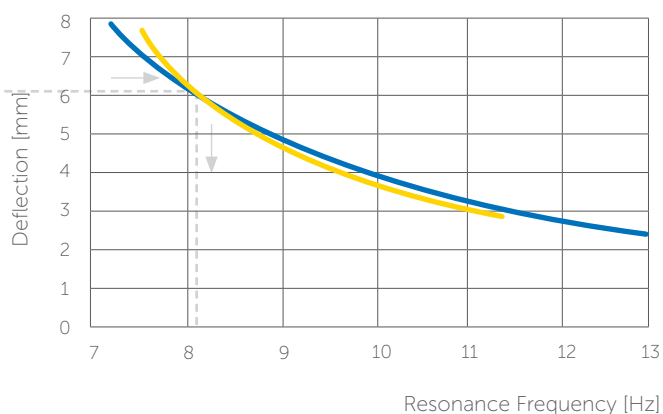

● Stravilink ISH-P1200


● Stravilink ISH-P2200



The resonance frequency of a Stravilink hanger can be determined by its load. To start the calculation use the graph "Deflection as Function of Load" this will provide the deflection at the specified load. Then moving horizontally to the right hand side plot "Deflection as Function of Frequency" on which the corresponding resonance frequency can be found. As an example, the resonance frequency of a Stravilink ISH-P1200 loaded with 1000 N is determined. The corresponding deflection is 6 mm. The resonance frequency of a spring at 6 mm deflection is 8 Hz.



## ACCESSORIES




### Perimeter Strip

1. Self-adhesive perimeter strip to isolate the ceiling from the adjacent walls.

Note: Standard widths of 50 mm, 100 mm, and 150 mm are available in 10 lm rolls.




## General principle

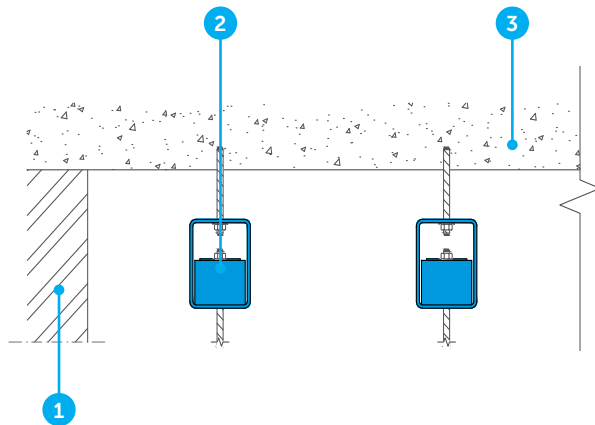


1. Wall
2. Stravilink ISH-P
3. Concrete Slab

## 47/60 mm channel - double grid

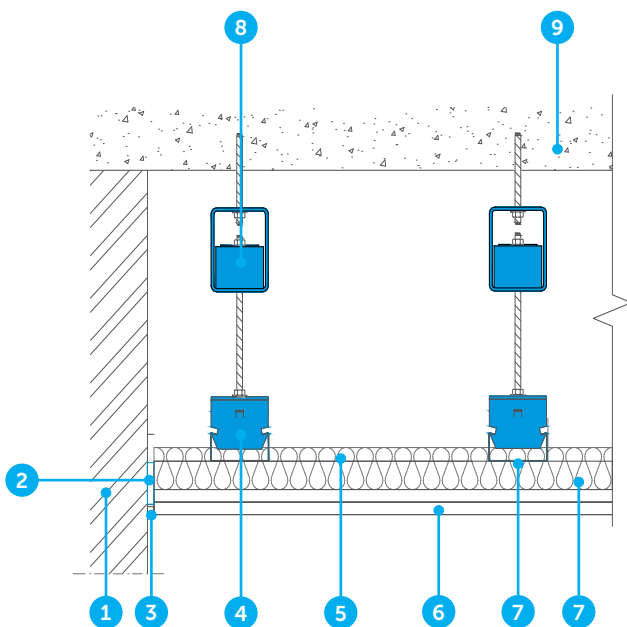


1. Wall
2. Perimeter Strip
3. Elastic caulk
4. C Clip
5. Absorption layer
6. Plasterboards, gypsum board or dry lining
7. 47/60 mm channel
8. Stravilink ISH-P
9. Concrete Slab

### MF grid

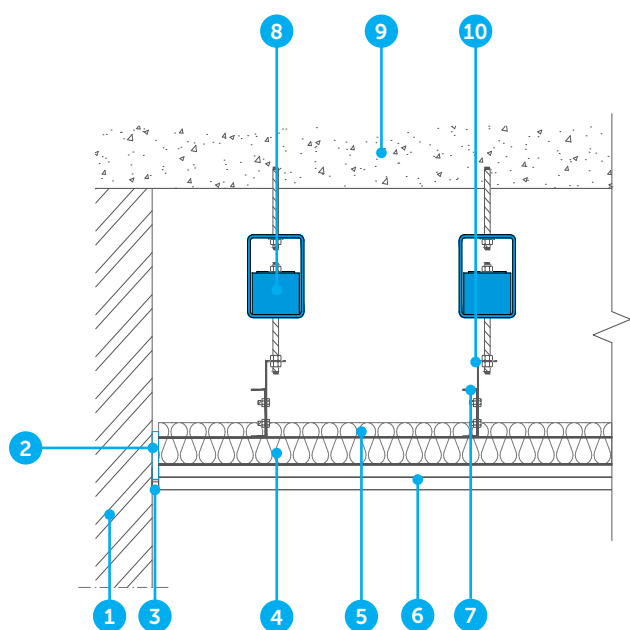

1. Wall
2. Perimeter Strip
3. Elastic caulk
4. British Gypsum MF5 secondary channel
5. Absorption layer
6. Plasterboards, gypsum board or dry lining
7. British Gypsum MF7 primary channel
8. Stravilink ISH-P
9. Concrete Slab
10. Pre-formed angle bracket

### Unistrut + MF5 grid

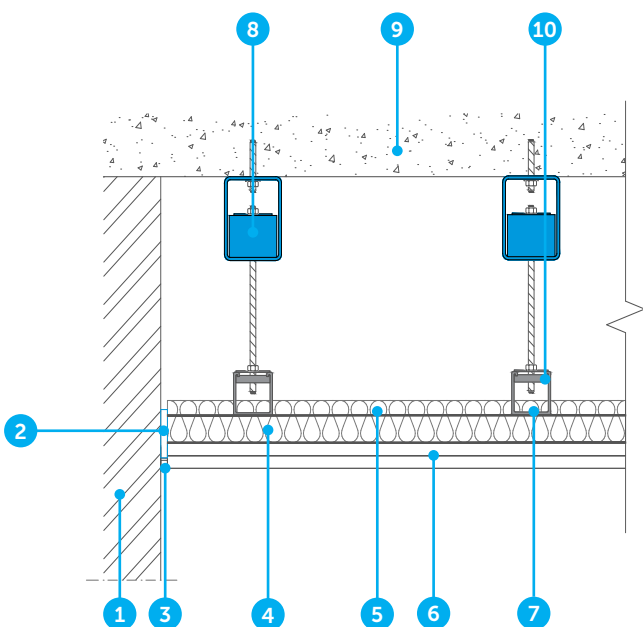

1. Wall
2. Perimeter Strip
3. Elastic caulk
4. British Gypsum MF5 secondary channel
5. Absorption layer
6. Plasterboards, gypsum board or dry lining
7. Unistrut primary channel
8. Stravilink ISH-P
9. Concrete Slab
10. Channel nut

### DISCLAIMER

This information is accurate to the best of our knowledge at the time of issue. Information, data and recommendations provided are based on industry accepted testing and prior product usage. It is intended as descriptive of the general capabilities and performance of our products and does not endorse applicability for any particular project. We reserve the right to change products, performance, and data without notice. This document replaces all information supplied prior to the publication hereof.



Vismeerstraat 3 - 5384 VL Heesch  
0800 55555 44  
info@delta-l.nl  
<https://www.delta-l.nl>

IBAN: NL79 RABO 0375036717  
BIC: RABONL2U  
BTW: NL811318539B01  
KvK: 08071864

## Delta-L B.V. | CDM Stravitec Nederland

Delta-L is specialist op het gebied van geluidsisolatie en trillingsisolatie en ontwerpt, levert en monteert diverse systemen voor akoestische ontkoppelingen in de bouw en industrie.

Delta-L vertegenwoordigt CDM Stravitec op de Nederlandse markt. CDM Stravitec is opgericht in 1951 en is marktleider op het gebied van akoestische oplegsystemen voor de bouw en industrie en is actief in tientallen landen (30+ vestigingen wereldwijd).

Door onze expertise, jarenlange ervaring en grote database aan meetresultaten van zowel interne en externe laboratorium metingen als in situ metingen hebben we door de jaren heen een uitgebreid assortiment aan akoestische materialen ontwikkeld, welke we op een slimme manier verwerken in diverse akoestische systemen.

Tevens zijn wij hierdoor in staat u adequaat van dienst te zijn bij elke stap in het proces: analyse van het geluid of trilling probleem, het aanleveren van een akoestisch ontwerp, optimalisatie van het ontwerp, productie, levering en montage.

Er wordt continu gewerkt aan innovatie en optimalisatie van de akoestische systemen om uw wensen en eisen om te zetten in een deskundig advies op maat.